


# GEN4 PRO XTREME ECU / PC / In-Vehicle Wireless Router Network Configuration

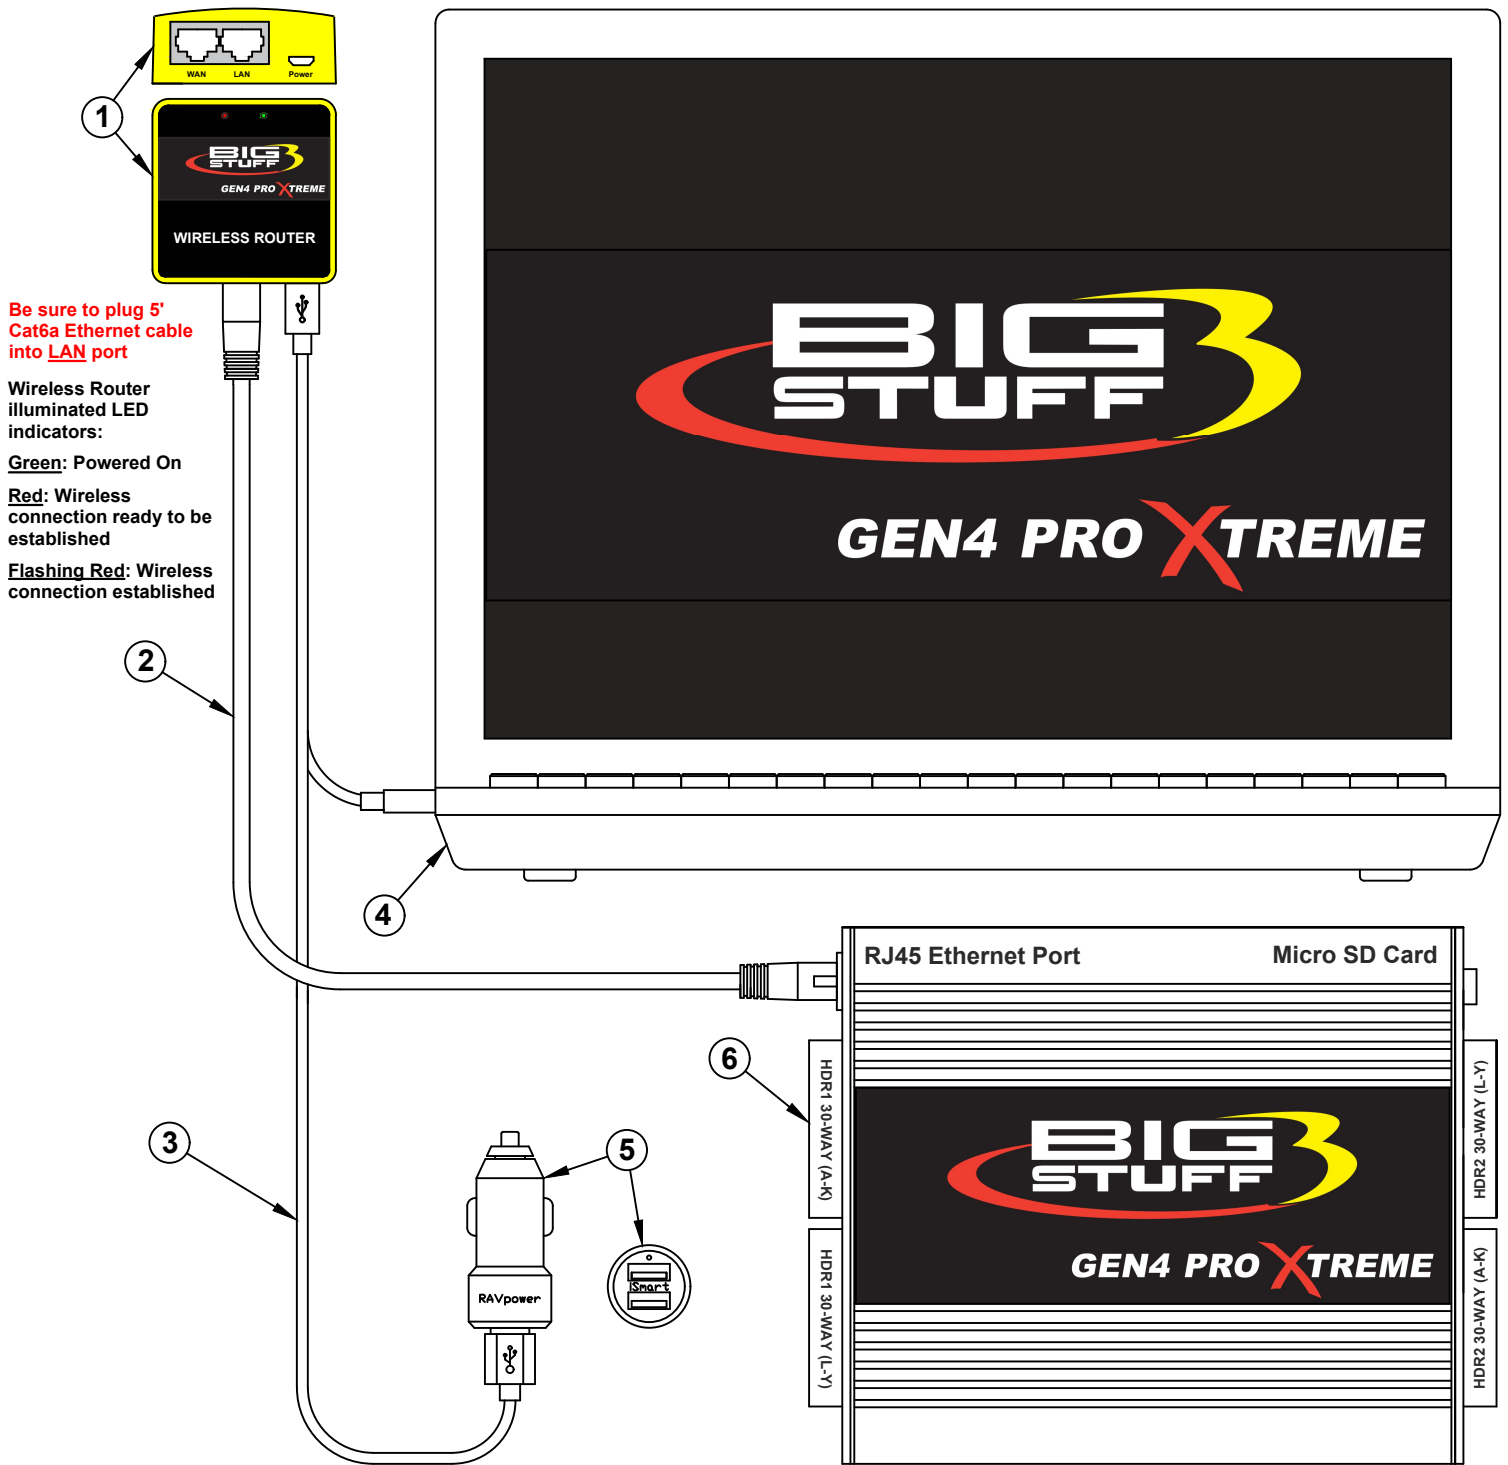

- ① GEN4 PRO XTREME GLiNET In-Vehicle Wireless Router
- ② 5' CAT6a Shielded Ethernet Cable
- ③ Micro USB / USB2.0 Power Cable
- ④ PC running BIGCOMM PRO Software
- ⑤ Dual 5V / 2.4A USB2.0 Car Charger
- ⑥ GEN4 PRO XTREME ECU

## Connection Instructions

1. Connect one end of the 5' CAT6a Shielded Ethernet Cable to the Wireless Router's RJ45 **LAN** port and the other end to the GEN4 PRO XTREME ECU's RJ45 Ethernet port.

2. Connect the Micro USB end of the Micro USB / USB2.0 Power Cable to the Wireless Router's Micro USB Power port and the other end to the PC's USB2.0 port (provides 5V/1A power to Wireless Router) or to the Dual 5V/2.4A USB2.0 Car Charger.